

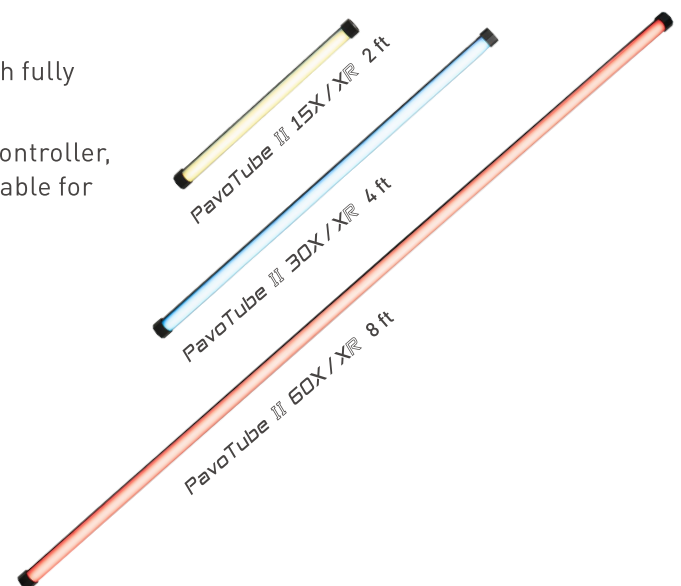


PavoTube II X/XR

LED RGBWW Pixel Tube Light


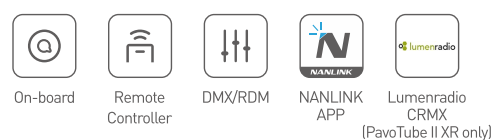


- 1. Better Light Quality, Beyond Imagination** Wider CCT range from 2700K-12000K with G/M adjustment.
- 2. Pixel Effect, More Creative Possibility** 10 pixel effects with fully customization for enhanced creativity.
- 3. Intelligent Control, More Versatility** On-board, Remote Controller, NANLINK APP, DMX/RDM, LumenRadio CRMX (*Only available for PavoTube II 15XR/30XR/60XR).
- 4. Intuitive Operation, Infinite Means** Octagonal design, 3 × 1/4"-20 mounts, built-in battery. Wherever you go, the lighting goes on.
- 5. Glow Underwater, Challenge the Impossibility** With waterproof housing IP68, 2/4/8 ft available, offer different length options for different kinds of shooting.

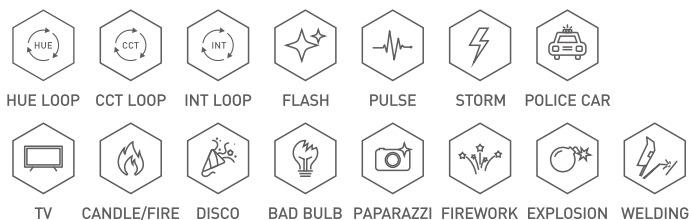

NANLITE Global

Accessories (Optional)

								
AS-EB(*Included) Eyebolt	HD-T12-1-MC Magnet Tube Clip	HD-T12-1-BPR T12 Tube Light Clip with 2-Way Baby Pin Receiver	BD-PTII15X/30X+EC Barndoor & Eggcrate	LS-FL-1/4 15X/30X Floor Stand	AS-MAM-PTIIX Multi-angle Mount	AS-WT-PTII15X/30X 15X/30X Waterproof Housing IP68	CB-DMX-ACP-1/2 DMX Adapter Cable	FR-T12-8+SB 8 Lights Frame with Softbox & Eggcrate
								
HD-T12-4-BHG T-12 Tube Holder for 4 tubes	HD-T12-2-BHG T-12 Tube Holder for 2 tubes	HD-T12-4-P T-12 Tube Holder for 4 tubes	HD-T12-2-P T-12 Tube Holder for 2 tubes	HD-T12-1-BHP T-12 Single Tube Holder	HD-T12-1-CP T-12 Single Tube Holder	HD-T12-1-LA T-12 Single Tube Holder	LS-FL-T12 Floor Stand for 15/30 X/XR/C	LS-FL-T12-PT-8FT Floor Stand for 60X

PavoTube II X/XR Technical Data

Model	PavoTube II 15X/XR	PavoTube II 30X/XR	PavoTube II 60X/XR
Rated Power	35W	70W	106W
Input Voltage/Current	DC 15V/2A Max AC 100-240V 50/60Hz	DC 15V/4A Max AC 100-240V 50/60Hz	DC 15V/6.5A Max AC 100-240V 50/60Hz
Battery Capacity	14.8V/2200mAh	18.5V/4400mAh	18.5V/8800mAh
Battery Run Time	100% brightness≈1h26mins; 1% brightness≈23h	100% brightness≈2h13mins; 1% brightness≈29h	100% brightness≈1h57mins; 1% brightness≈36h
CRI	Average 97		
TLCI	Average 98		
CCT	2700K-12000K (G/M)		
Dimming	0-100%		
Control	On-board, Remote Controller, NANLINK APP, DMX/RDM, LumenRadio CRMX (*Only available for PavoTube II 15XR/30XR/60XR)		
Pixel Effect	HUE Loop, CCT Loop, INT Loop, Multi-color, Fade, Scroll, Rainbow, *Process, *Fire, *Driving (*Only APP Control)		
Product Size	φ43 × 600mm / φ1.69 × 23.62"	φ43 × 1145mm / φ1.69 × 45.08"	φ43 × 2220mm / φ1.69 × 87.4"
Product Weight	0.82kg/1.81lb	1.58kg / 3.48lb	2.9kg / 6.39lb

Illumination (lux / fc)

Model	PavoTube II 15X/XR			PavoTube II 30X/XR			PavoTube II 60X/XR		
Distance	1M	2M	3M	1M	2M	3M	1M	2M	3M
2700K	343 lux 32 fc	86 lux 8 fc	38 lux 4 fc	686 lux 64 fc	174 lux 16 fc	78 lux 7 fc	900 lux 84 fc	336 lux 31 fc	180 lux 17 fc
5600K	377 lux 35 fc	94 lux 9 fc	42 lux 4 fc	746 lux 69 fc	189 lux 18 fc	84 lux 8 fc	991 lux 92 fc	369 lux 34 fc	194 lux 18 fc
R	150 lux 14 fc	39 lux 4 fc	17 lux 2 fc	272 lux 25 fc	69 lux 6 fc	30 lux 3 fc	332 lux 31 fc	131 lux 12 fc	68 lux 6 fc
G	308 lux 29 fc	77 lux 7 fc	34 lux 3 fc	586 lux 54 fc	144 lux 13 fc	64 lux 6 fc	783 lux 73 fc	295 lux 27 fc	153 lux 14 fc
B	63 lux 6 fc	15 lux 1 fc	7 lux 1 fc	123 lux 11 fc	31 lux 3 fc	14 lux 1 fc	143 lux 13 fc	55 lux 5 fc	28 lux 3 fc